

# CLEARVIEW<sup>®</sup>


Est. 1935

A.I.A. File No. 16-1

## MODEL 80A

### DH-A2 - H ALUMINUM DOUBLE HUNG WINDOW

WITH CLEARVIEW'S EXCLUSIVE SNAP-OUT UPPER AND LOWER SASH

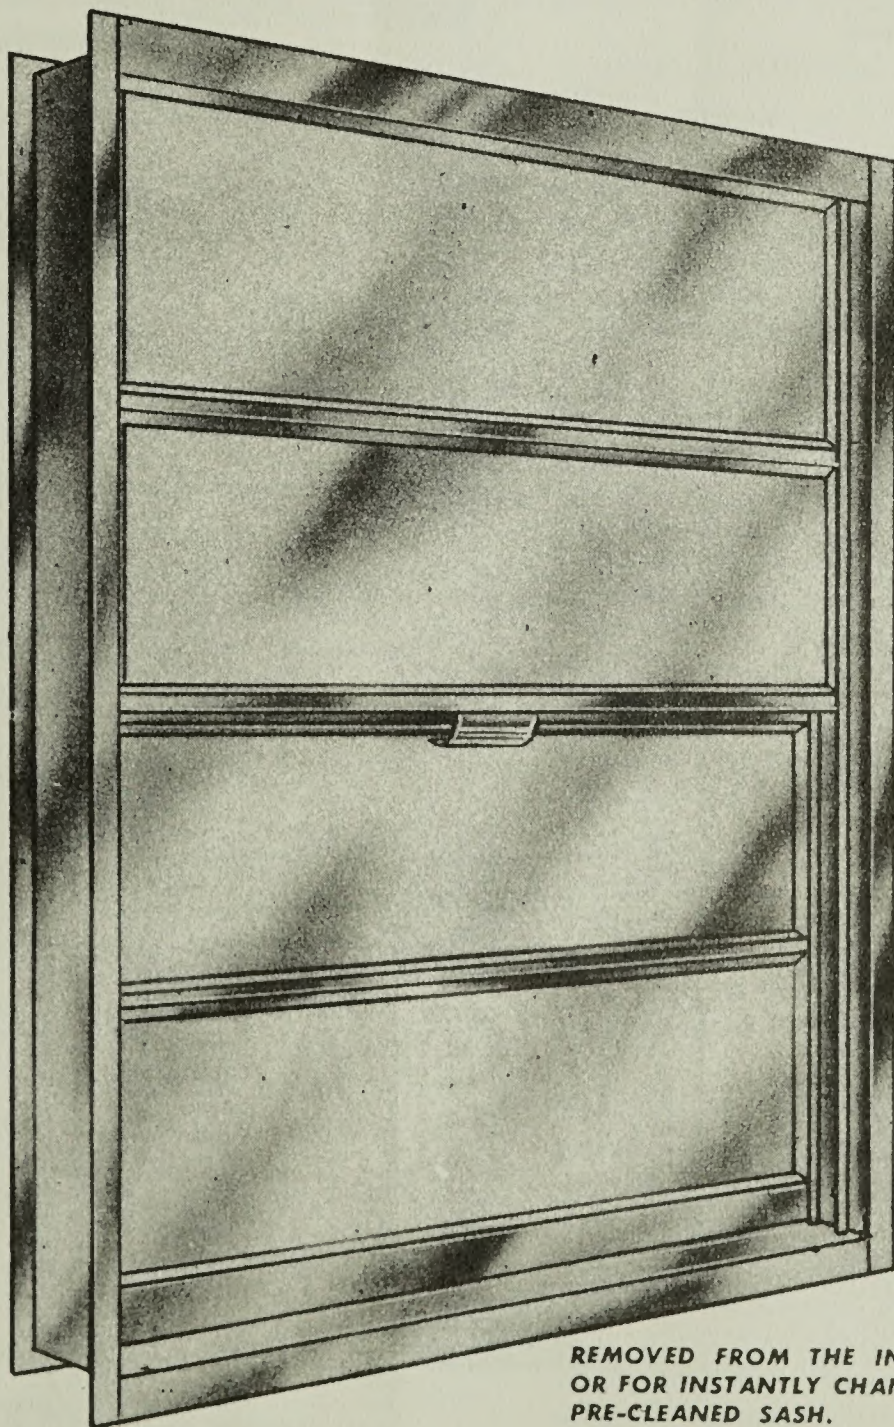

SCHOOLS

HOSPITALS


OFFICE BUILDINGS

FACTORIES



SASH EASILY  
REMOVED FROM THE INSIDE FOR CLEANING  
OR FOR INSTANTLY CHANGING TO SPARKLING  
PRE-CLEANED SASH.

# BEFORE YOU BUY: COMPARE



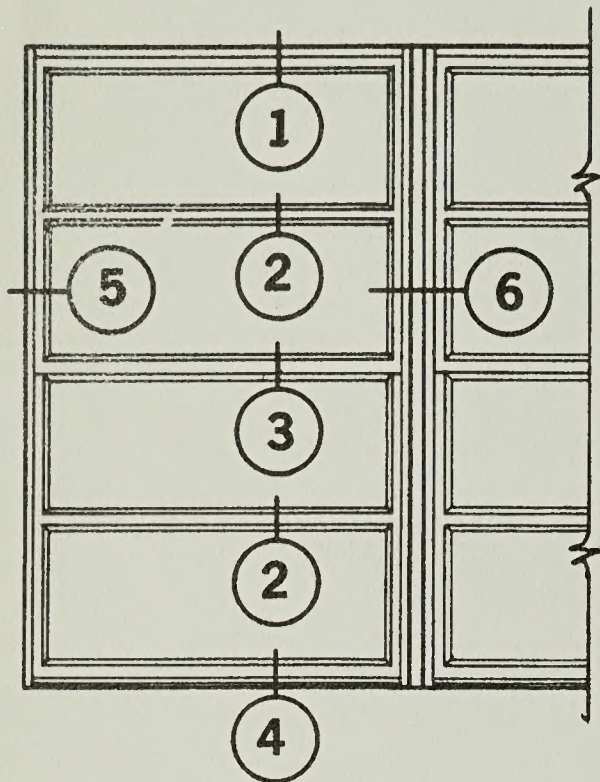


**ELEVATION**

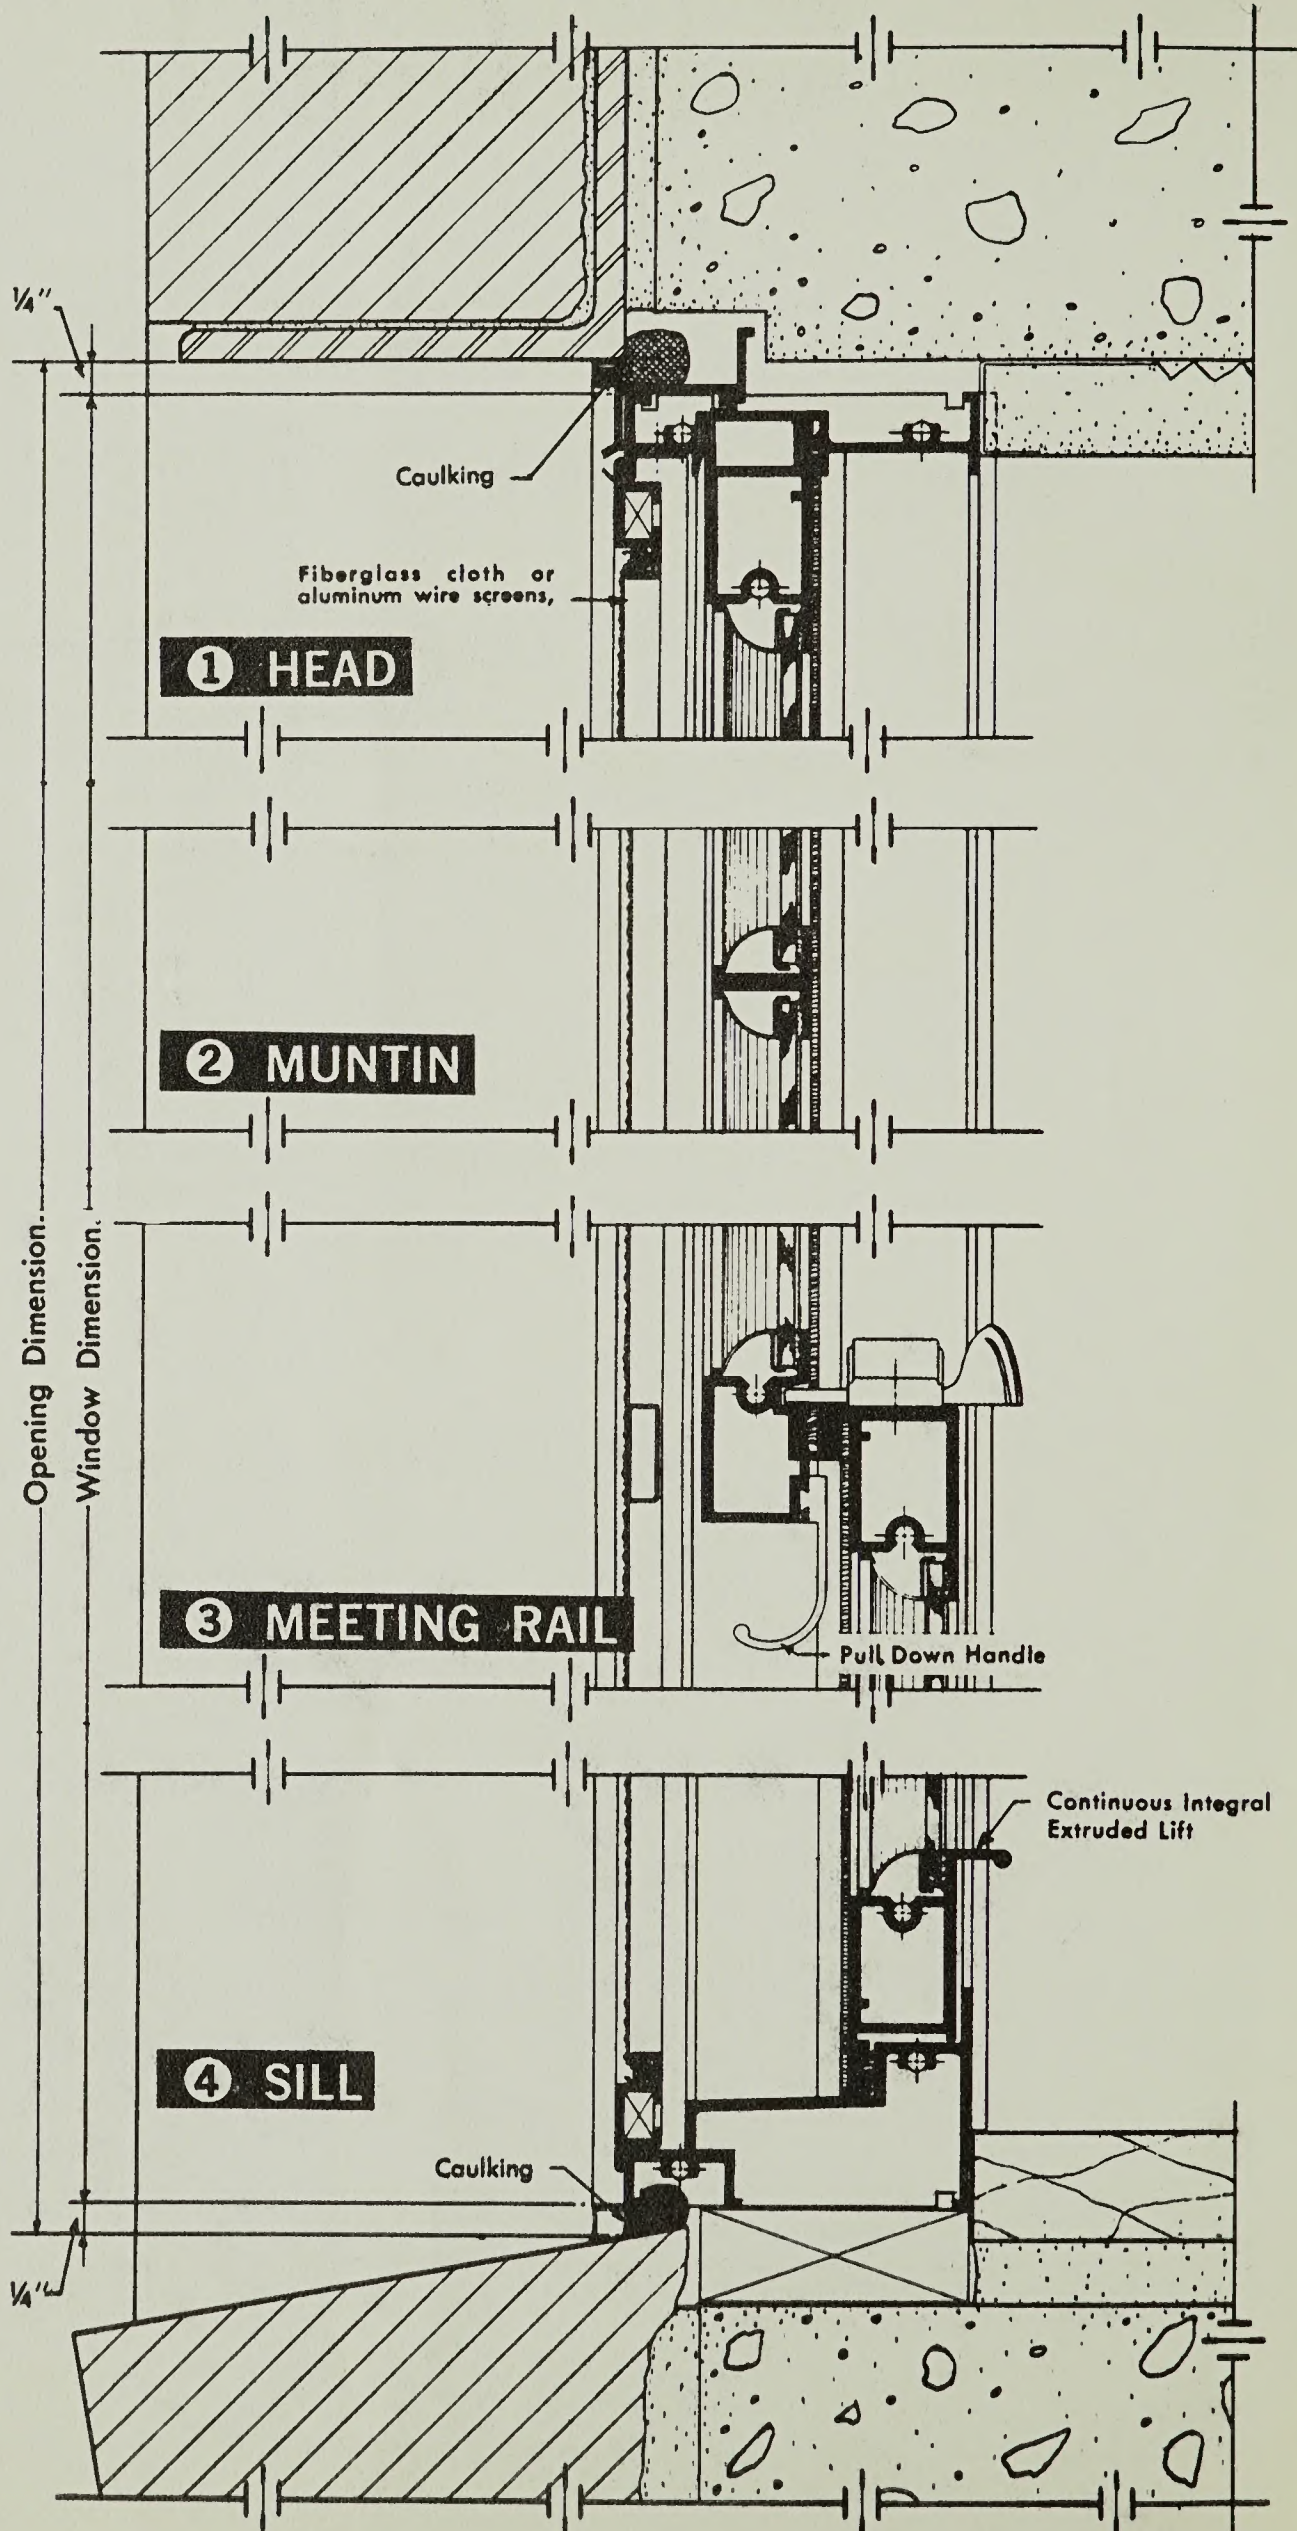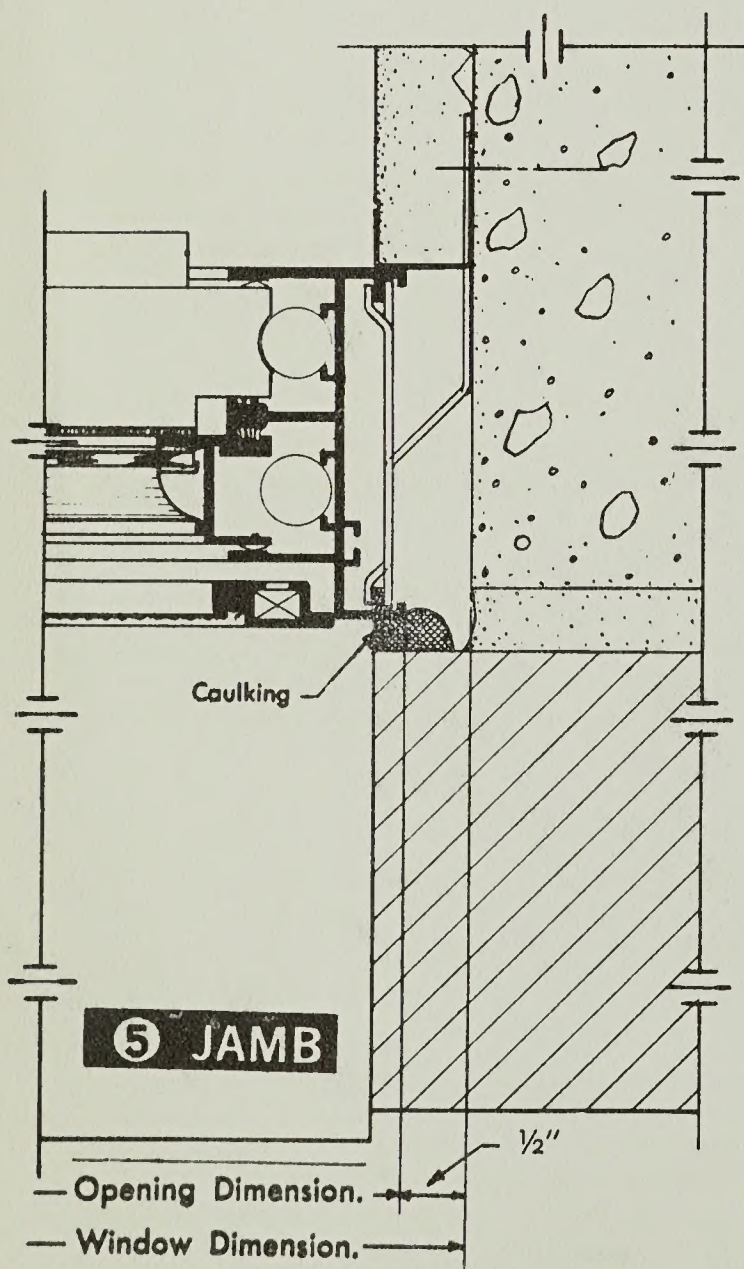



# DH-A2-H ALUMINUM DOUBLE HUNG WINDOW

## TYPICAL DETAILS 1/2 SIZE

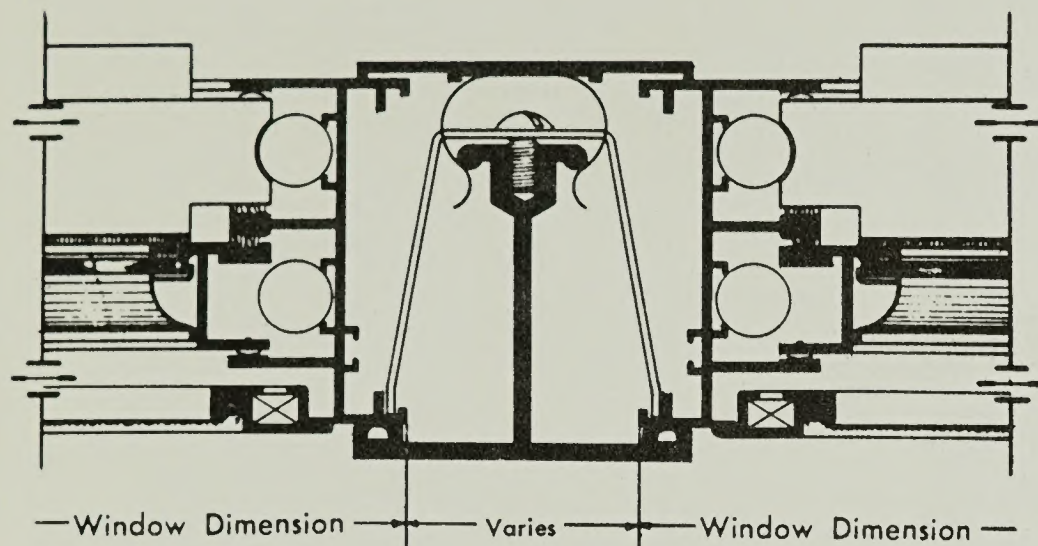

### 6 MULLION

#### HEAVY EXTRUDED MODULAR SIZES

|      | 2'0" | 2'8" | 3'0" | 3'4" | 3'8" |
|------|------|------|------|------|------|
| 3'0" |      |      |      |      |      |
|      | 2030 | 2830 | 3030 | 3430 | 3830 |
| 3'8" |      |      |      |      |      |
|      | 2038 | 2838 | 3038 | 3438 | 3838 |
| 4'4" |      |      |      |      |      |
|      | 2044 | 2844 | 3044 | 3444 | 3844 |
| 5'0" |      |      |      |      |      |
|      | 2050 | 2850 | 3050 | 3450 | 3850 |
| 5'8" |      |      |      |      |      |
|      | 2058 | 2858 | 3058 | 3458 | 3858 |
| 6'0" |      |      |      |      |      |
|      | 2060 | 2860 | 3060 | 3460 | 3860 |

## SPECIFICATIONS MODEL 80A WINDOW

### 1. GENERAL

All Double-Hung Windows on the architect's drawings shall be "Clearview's Model No. 80 Window" as manufactured by Clearview Corporation. Windows will be furnished in the sizes indicated. Windows shall meet or exceed Aluminum Manufacturers Association Specification DH-A2-H.

### 2. FRAME — MATERIAL AND CONSTRUCTION

The window frame shall be manufactured of 6063-T5 mill finish extruded aluminum alloy having a minimum thickness of .062 inch for head and jamb members and .078 inch for sill members. Head, sill and jamb members shall be of one piece construction. Applied members will not be acceptable.

### 3. SASH — MATERIAL AND CONSTRUCTION

Upper and lower sash to be manufactured from 6063-T5 mill finish extruded aluminum alloy having a minimum thickness of .064 inch. All horizontal sash rails to be of tubular extruded members. Joint of the sash members shall be neatly fitted and securely connected. Sash to be constructed so that both upper and lower sash will be easily removed from frame. Muntins furnished where specified.

### 4. HARDWARE

Windows to have four (4) adjustable spiral sash balances; continuous lift extruded integral with bottom rail of lower sash; pull down handle on meeting rail of upper sash (two (2) for windows 3'-0" wide or wider, one (1) for windows less than 3'-0" wide); one (1) sash lock per window.

### 5. SASH WEATHERSTRIPPING

Heavy metal backed wool pile and vinyl fin weatherstrip assures dust and weather tightness around perimeter of both upper and lower sash.

### 6. ERECTION

Windows to be installed straight, plumb and level without twisting and anchored in accordance with manufacturer's details. After windows are installed and glazed, they are to be adjusted if necessary.

### 7. GLAZING

Windows to be glazed with S.S.B. 7 square feet or under per sash, D.S.B. over 7 square feet, per sash, sealed on interior of sash with aluminum colored sealant approved for glazing of aluminum windows, and a vinyl snap on glazing bead on exterior of sash.

### 8. SCREENS


Where indicated on plans and specifications, frames of extruded aluminum .064 minimum thickness. Screen frames to have neatly mitered corners, reinforced, and securely locked. Screen cloth shall be 18-14 mesh fiberglass securely retained by a vinyl spline or 18-16 mesh alclad aluminum cloth.

## MODEL 80A DOUBLE-HUNG WINDOW



**MADE FOR SCHOOLS, HOSPITALS, HOTELS, MOTELS, APARTMENTS AND OFFICE BUILDINGS**

**DOUBLE HUNG SASH INSIDE**  
DH-A2-H

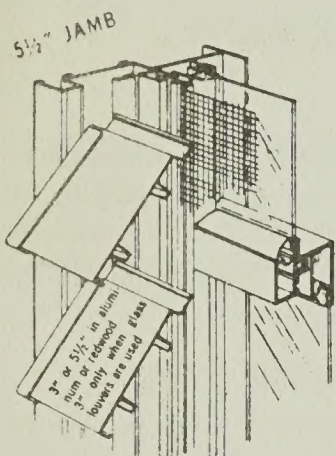


**MODEL 70A SOLAR SHADE WINDOW**

5 1/2" or 3" extruded aluminum exterior louvers are adjustable from fully closed to open 90 degrees. Louvers are standard mill, alumilite, or baked enamel finish. Model 70A solar windows 52" and taller have separate operators for upper and lower halves.

The upper and lower sash of the aluminum double hung window are of the snap out type. **EASILY REMOVED FROM THE INSIDE FOR CLEANING OR FOR INSTANTLY CHANGING TO SPARKLING PRE-CLEANED SASH.**


**GLASS LOUVER WINDOW**  
J-A1-H

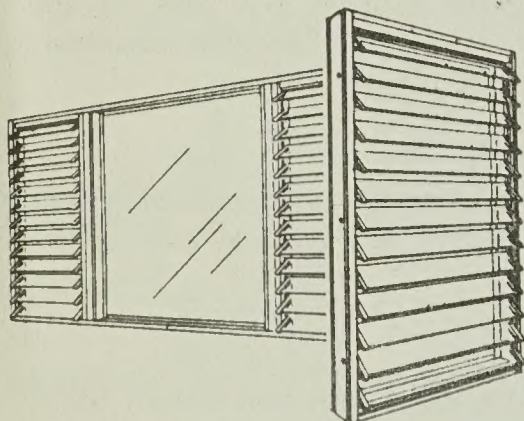

**MODEL 6A 3" LOUVERS**  
**MODEL 10 4" LOUVERS**

The window frames manufactured from 635-T5 extruded aluminum alloy of .064 thickness. Operator shall be Clearview Patented "LOC-TITE" or Gear operator. Screen frames recessed into window frames of .062 aluminum, interchangeable with snap out storm sash.


**GLASS LOUVERS INSIDE**  
J-A1-H

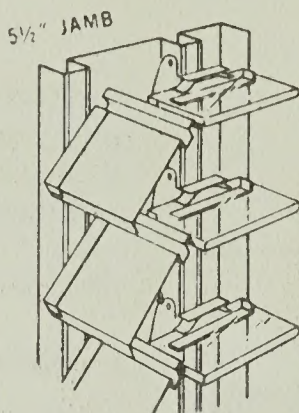

**MODEL 66A**

**DUAL LOUVER SOLAR SHADE WINDOW**


Model 66A has 3" width louvers only. Louvers to have standard mill, alumilite, or baked enamel finish. Interior and exterior louvers adjust separately. Dual louver windows 62" and taller have split operation of both interior and exterior louvers, permitting separate adjustment of top and bottom section of each window.

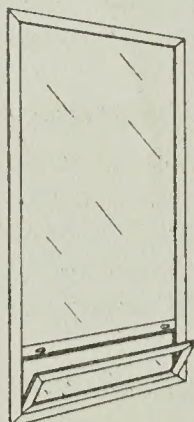

**1 minute snap-on inside**  
**STORM SASH**

For use in extremely cold climates where storm sash is a standard window accessory. In extruded aluminum frame with or without hopper vent. Easy to snap off the screen and snap on the storm sash.

**LOUVER DOOR INSERTS**  
(FOR NEW OR OLD DOORS)


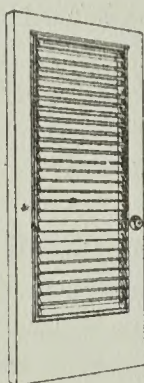


For light and ventilation with privacy. Douglas fir rims with glass (clear or obscure), aluminum or red wood louvers in full panel inserts.

Snap-on screen and/or storm sash eliminate need of separate door.

**5-IN-1 COMBINATION**  
**SUN CONTROL VISORS**

- Coolest Awning
- Prowler and Privacy Guard
- Storm and Hurricane Shutter
- Ventilation and Light Control

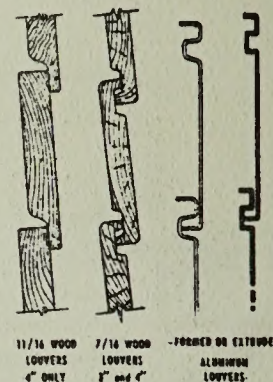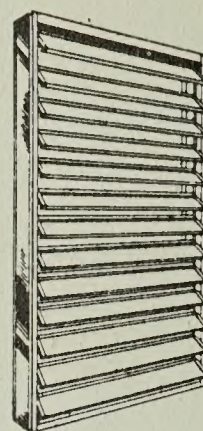


**3" OR 4" REDWOOD, FORMED OR**  
**EXTRUDED ALUMINUM INTERLOCKING**  
**LOUVERS OPTIONAL**

Optional inside snap-in screen or storm sash. May be mullied with glass louver windows and/or picture window frames, or this unit complete with glazed storm sash may be your picture window.



Patent  
2,564,152

**TWO MODELS TO CHOOSE FROM—No. 1 Economy Model with Formed Frame or No. 4 Deluxe Model with heavy extruded frame, with or without inside removable screen (interchangeable with CLEARVIEW storm sash where required).**

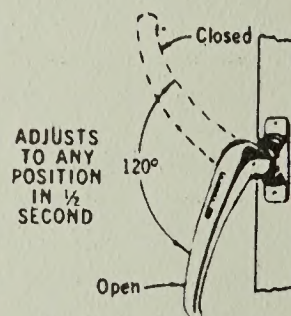

ADJUSTS  
TO ANY  
POSITION  
IN 1/2  
SECOND

Patent Nos. 23961 and 22626529  
(other patents applied for)

**CLEARVIEW "LOC-TITE" OPERATOR — CHROME PLATED ZAMAK NO. 5, OR STAINLESS STEEL SERIES 316. "Loc-tite" operator mechanism for split-second closing. Requires only one-quarter turn. Louvers lock in any position. Fool-proof cam type for rugged use..**

For further details and specifications, prices and literature, call or write your Clearview dealer or our nearest office.

MANUFACTURED BY

**CLEARVIEW CORP.**  
Est. 1935

COMPTON, CALIF.  
2200 N. Parmelee  
Nevada 6-2428

DALLAS, TEXAS  
2625 Elm St.  
Riverside 1-6071

FT. LAUDERDALE, FLA.  
3318 S.W. Second Ave.  
Jackson 2-8526

SAN MATEO, CALIF.  
3987 Pacific Blvd.  
345-8231

ST. PETERSBURG, FLA.  
3027 Ninth Street N.  
862-8449

HOUSTON, TEXAS  
2308 Texas Ave.  
Capitol 8-4508

PHOENIX, ARIZONA  
2308 S. 11th Ave.  
Alpine 2-4808

FRESNO, CALIF.  
2943 Adaline Ave.  
264-3171

ALBUQUERQUE, N. M.  
2110 Second St., S.W.  
243-3596

JACKSON, MISS.  
1045 High St.  
Fleetwood 3-1537

MEMPHIS, TENN.  
2078 So. Bellevue  
Whitehall 6-4411

ADV-127 1-64

AT  
8805  
C58  
195-2

Dealers located in principal cities